

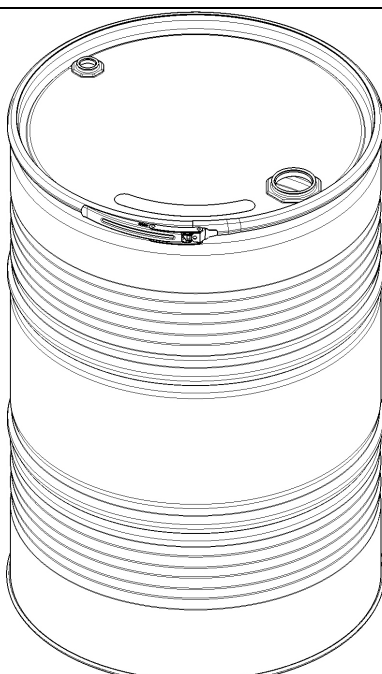
# Packaging - Specification container for transport

# SCHÜTZ

213l open head steel drum 1,2 / 1,0 / 1,0 mm  
with 2 "w" rolling hoops + 6 reinforcing beads  
G2 and G3/4 bungs

SCHÜTZ GmbH & Co. KGaA  
Schützstraße 12  
D 56242 Selters / Germany

date: 05.11.2025

<b>Customer:</b>		<b>Packaging No.: 84042</b>	<b>Schütz Article No.: 4056457</b>	
		<b>STEEL OPEN HEAD DRUM</b> (in accordance with DIN ISO 15750-1)		
		<b>Material top, body and bottom:</b>	Low carbon steel EN 10130 -DC01-Am Tolerances: EN 10131	
		<b>Description:</b>	Body electrically welded, bottom seamed with triple round seam, with 2 rolling hoops & 6 reinforcing beads on body, not suitable for container loading	
		<b>Surface:</b>	Outside: jet black, RAL9005 Inside: raw	
		<b>UN marking for liquids:</b> (lower body edge, acc. VPA 6)	UN 1A2/Y1.5/120/...*/D/BAM7063-SCHÜTZ (* = year of production)	
		<b>UN marking for solids:</b> (lower body edge, acc. VPA 6)	UN 1A2/Y365/S/...*/D/BAM7063-SCHÜTZ (* = year of production)	
		<b>Product drawing No.:</b>	3-8721	
		<b>Silk-screen:</b>	---	
		<b>Gasket lid:</b>	EPDM	
<b>Dimensions</b>	<b>(mm)</b>	<b>BUNG CLOSURE SYSTEM</b> (in accordance with DIN ISO 15750-3)		
<b>Height overall:</b>	880,0 ±6	<b>Closure types:</b>	G2 and G¾	
<b>Diameter over seam:</b>	595,0 ±1	<b>Flange:</b>	Steel, zinc plated	
<b>Diameter over rolling hoops:</b>	595,0 ±1	<b>Flange washer:</b>	Double washer	
<b>Diameter over tension ring:</b>	605,3 ±2	<b>Plug:</b>	Steel, zinc plated	
<b>Inner diameter:</b>	571,5 +1/-0,5	<b>Plug washer:</b>	PE	
<b>Thickness top, body, bottom:</b>	1,2 / 1,0 / 1,0	<b>Torque:</b>	*	
<b>Tension ring:</b>	52 x 2,00	<b>Cap sealing:</b>	G¾ steel seal cap yellow, clinched	
<b>Nominal capacity:</b>	213,0 ltr.	<b>Tension ring:</b>	Steel EN 10327-DX51D+Z175	
<b>Weight total:</b>	20,8 ±1,249kg			

**Note:**

- testing and description acc. VPA 2, 4, 6, 7 and 8
- UN marking stamped in bottom
- double approval
- w/ metal sheet mounted
- 8pcs + 4pcs. on CP3-Pallet, completely stretched in stack

\* all bung closures, unless otherwise specified, closed as for transport according to torque specification (fact sheet torques [www.schuetz.net](http://www.schuetz.net))

## Packaging - Specification container for transport



**213l open head steel drum 1,2 / 1,0 / 1,0 mm  
with 2 “w” rolling hoops + 6 reinforcing beads  
G2 and G3/4 bungs**

SCHÜTZ GmbH & Co. KGaA  
Schützstraße 12  
D 56242 Selters / Germany

date: 05.11.2025

### User information:

By implementing and continually improving extensive preventive programmes, SCHÜTZ strives towards minimising the potential contamination risk for filling material in line with the current state of the art and in accordance with recognised and applicable quality and system standards.

In industrial manufacturing, however, the possibility of particles arising cannot be fundamentally and entirely eliminated. Specifically for plastic and steel packaging, unavoidable friction during opening and closing as well as static charging of the packaging contribute to the development of particles and/or the possibility of particles being attracted. Such particles can then also invariably penetrate the packaging interior.

With the goal of minimising the risk of particle formation and transmission into packaging, users are recommended – particularly during further processing – to keep packaging closed wherever possible and to keep the number of opening and closing procedures as low as possible.

In the case of sensitive filling materials or filling material applications (e.g. for food/pharmaceutical products, paint or electro-chemicals), it is also recommended that the filling material is filtered on removal or prior to further processing.

### PLEASE NOTE:

The above statements are based on our current knowledge and experience. It does not exempt the user of our packaging from carrying out his own tests. No legally binding assurance can be derived from our information. It is the responsibility of the customer to comply with all applicable laws and regulations.

We would like to point out that in particular the legal transport obligations according to the Orange Book / IMDG / ADR / RID must be observed (Chapter 4.1.3.1 and also 49 CFR §173.24 (e) in the USA). It is therefore the responsibility of the filler or distributor to test the material compatibility of the filling product with the packaging and to evaluate the general suitability for the respective intended use.

Please note that for applications in EX-zones, the applicable contents of IEC TS 60079-32-1 and TRGS 727 must be observed, irrespective of the information given in the Material Safety Data Sheet (MSDS).